




- Coated paperboard with beige front and back.
- Up to 47% recycled fibre.
- 100% recyclable and biodegradable.

Product in launch stage with specifications in validation process

GRAMMAGE g/m <sup>2</sup>	THICKNESS µm	STIFFNESS (Taber 15°) gr.cm		RECYCLED COMPONENT %
		MD	CD	
290	450	175	85	47
320	520	260	130	47
350	572	330	158	46

MOISTURE	8.0 %
COBB 60 Top	Unglued

TOLERANCES	
Grammage	± 5%
Thickness	± 5%
Stiffness	- 15%
Recycled Component	± 5%
Moisture	± 1.5%
Reels Width	- 1 + 2 mm
Sheets Width and length	- 1 + 2 mm

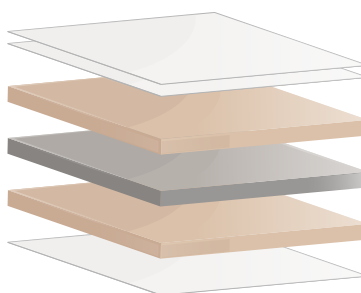

- Top Coating
- Top: Virgin and recycled fibres
- Middle: Virgin and recycled fibres
- Bottom: Virgin and recycled fibres
- Bottom Coating

The specifications expressed are guaranteed for 95% of our manufacturing.



La marca de la gestión forestal responsable

